

HC6120系列

产品特性

FEATURES


- Intel® 6th/7th/8th/9th Gen Processors with LGA1151
- Support for 2 independent displays via dual DP and one VGA port with resolution up to 4K UHD
- 2 x DDR4 SO-DIMM sockets support up to 32GB memory
- 6 x Gigabit LAN(5 x Intel i210-AT and 1 x Intel i219-LM)
- 2 x RS-485, 2 x RS-232
- Compact and fanless design



| 产品参数  |        |                                                                                    |
|-------|--------|------------------------------------------------------------------------------------|
| 系统参数  | CPU    | Intel® Core™ i3-9100/i5-6400/i5-9400                                               |
|       | 芯片组    | H110                                                                               |
|       | BIOS   | AMI 64Mbit UEFI                                                                    |
|       | 内存     | 2x SODIMM DDR4, MAX 32GB                                                           |
|       | 储存     | 1x M.2 M-Key 2280, SATA 3.0; 1 x SATA, support 2.5"SSD/HDD                         |
| 外部I/O | 显示     | 2x DP, MAX 4096 x 2304@60Hz;<br>1x VGA, MAX 1920 x 1080@60Hz;<br>DP+DP/DP+VGA 独立双显 |
|       | 以太网    | 1x LAN, Intel® I219LM<br>5x LAN, Intel® I210AT                                     |
|       | 串口     | 2x RS-232; 2x RS-485                                                               |
|       | USB    | 4x USB3.0; 4x USB2.0                                                               |
|       | 音频     | 1x Line-out、1x Mic-in, Realtek ALC662                                              |
| 其他    | REMOTE | 支持远程开关和指示灯的4针连接器                                                                   |
|       | RESET  | 支持关机长按重置BIOS                                                                       |

| 产品参数 |          |                            |
|------|----------|----------------------------|
| 内部扩展 | USB      | 1xUSB2.0, Type-A           |
|      | miniPCle | 1x miniPCle, 可扩展 WLAN/WWAN |
|      | SIM      | 1x USIM, 可扩展 3G/4G         |
|      | PCle     | -                          |
|      | PCI      | -                          |
| 操作系统 | OS       | Windows 10 IoT LTSC、Linux  |
| 电源   | 输入电压     | 24V DC IN, 3PIN Phoenix    |
|      | 整机功耗     | MAX 120W                   |
| 机械参数 | 安装方式     | 壁挂安装                       |
|      | 尺寸       | 220x226x75mm (长宽高)         |
|      | 净重       | 3.4kg                      |
|      | 工作温度     | 0~60℃, 带0.7m/s气流           |
| 环境参数 | 存储温度     | -40℃ ~85℃, 60℃ @ 95% (非凝结) |
|      | 相对湿度     | 10 ~ 95% @ 40℃(非凝结)        |
|      | EMC      | CE、FCC Class B             |

## HC6120

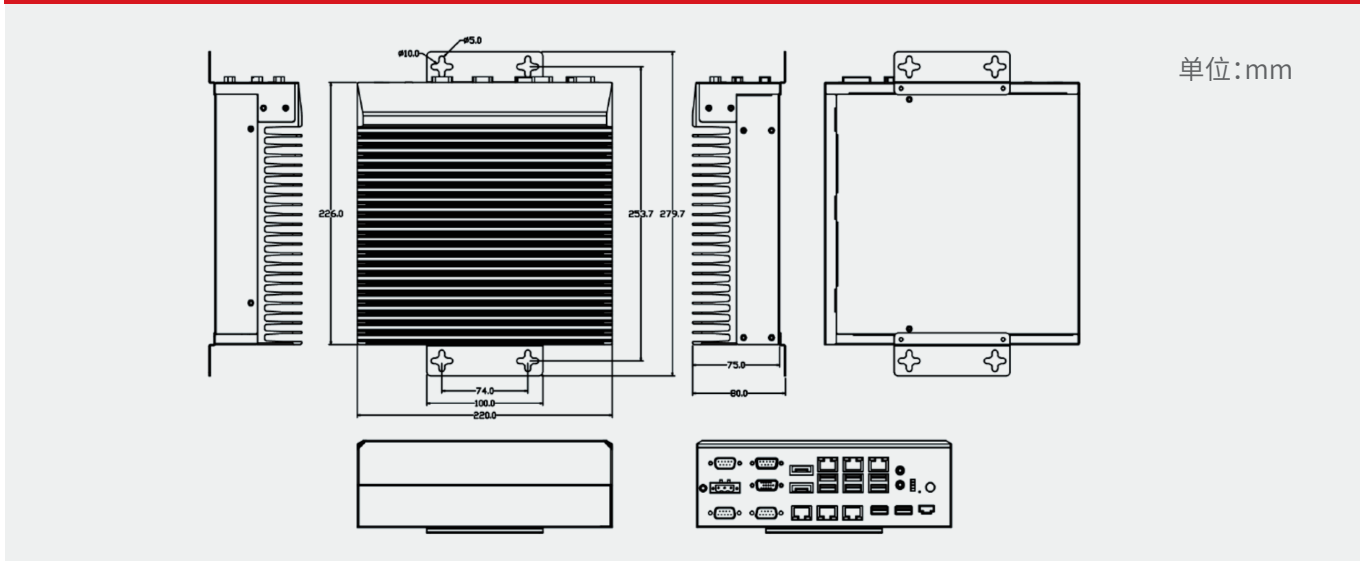

订购信息

| 型号           | CPU     | MEM    | SSD               | HDD ( 2.5'') | 扩展模组          |
|--------------|---------|--------|-------------------|--------------|---------------|
| HC6120-S9XXX | i3-9100 | 8G/16G | 128G/256G/512G/1T | 1T/2T        | WIFI模块/4G通信模块 |
| HC6120-C6XXX | i5-6400 | 8G/16G | 128G/256G/512G/1T | 1T/2T        | WIFI模块/4G通信模块 |
| HC6120-C9XXX | i5-9400 | 8G/16G | 128G/256G/512G/1T | 1T/2T        | WIFI模块/4G通信模块 |

\*XXX按顺序代表内存容量2<sup>X</sup>、固态硬盘容量2<sup>X</sup>、机械硬盘容量XT