

HC6124系列

产品特性


FEATURES

- Intel® 6th/7th/8th/9th Gen Processors with LGA1151
- Support for 2 independent displays via Dual DP and one VGA ports with resolution up to 4K UHD
- 2 x DDR4 SO-DIMM sockets support up to 32 GB memory
- 1 x PCIe Gen3 x16 slot, 1 x PCIe Gen2 x2 slot, 2 x PCI slots
- 6 x Gigabit LAN (5 x Intel i210, 1 x Intel i219-LM)
- 8 x USB ports and 1 x internal USB 2.0 Type-A connector
- 2 x RS485/232, 2 x RS232
- Compact and Rugged design



产品参数		
系统参数	CPU	Intel® Core™ i5-9400/i7-9700
	芯片组	H110
	BIOS	AMI 64Mbit UEFI
	内存	2x SODIMM DDR4, MAX 32GB
	储存	1x M.2 M-Key 2280, SATA 3.0; 3x SATA
外部I/O	显示	2x DP, MAX 4096 x 2304@60Hz; 1x VGA, MAX 1920 x 1080@60Hz; DP+DP/DP+VGA 独立双显
	以太网	1x LAN, Intel® I219LM支持网络唤醒; 5x LAN, Intel® I210AT
	串口	2x RS-232; 2x RS-485
	USB	4x USB3.0; 4x USB2.0
	音频	1x Line-out、1x Mic-in, Realtek ALC662
其他	REMOTE	支持远程开关和指示灯的4针连接器
	RESET	支持关机长按重置BIOS

产品参数		
内部扩展	USB	1xUSB2.0, Type-A
	miniPCle	1x miniPCle, 可扩展 WLAN/WWAN
	SIM	1x USIM, 可扩展 3G/4G
	PCle	1x PCle 16x (3.0) ; 1x PCle 4x (2.0, x2signal)
	PCI	2 x PCI
操作系统	OS	Windows 10 IoT LTSC、Linux
电源	输入电压	24V DC IN, 3PIN Phoenix
	整机功耗	MAX 120W
机械参数	安装方式	壁挂安装
	尺寸	220x226x176mm (长宽高)
	净重	4.0kg
	工作温度	0~60°C, 带0.7m/s气流
环境参数	存储温度	-40°C ~85°C, 60°C @ 95% (非凝结)
	相对湿度	10 ~ 95% @ 40°C(非凝结)
	EMC	CE、FCC Class B

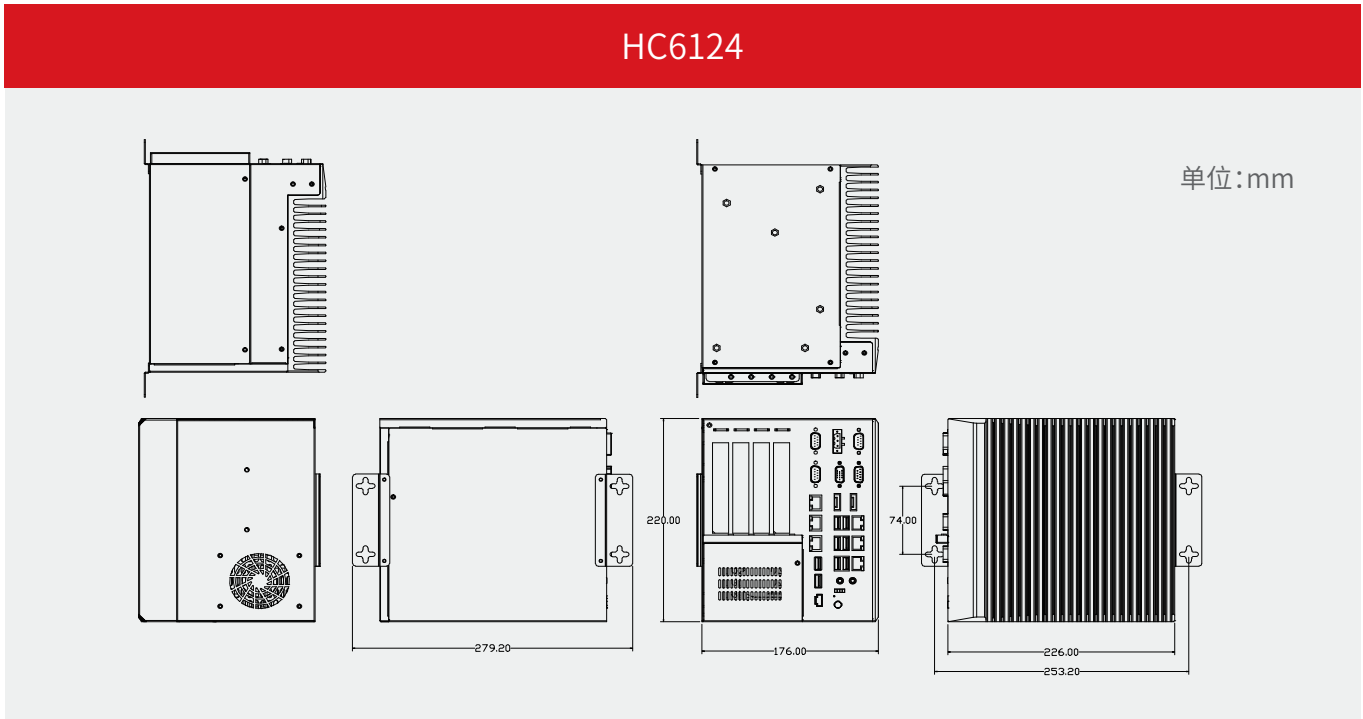

订购信息					
型号	CPU	MEM	SSD	HDD (2.5")	扩展模组
HC6124-C9XXX	i5-9400	8G/16G	128G/256G/512G/1T	1T/2T/4T	WIFI模块/4G通信模块
HC6124-M9XXX	i7-9700	8G/16G	128G/256G/512G/1T	1T/2T/4T	WIFI模块/4G通信模块

*XXX按顺序代表内存容量2^x、固态硬盘容量2^x、机械硬盘容量XT