

HC6110系列

产品特性

FEATURES

- Intel® 6th/7th/8th/9th Gen Processors with LGA1151
- Support for 2 independent displays via dual DP and one VGA port with resolution up to 4K UHD
- 2 x DDR4 SO-DIMM sockets support up to 32GB memory
- 3 x Gigabit LAN(2 x Intel i210-AT and 1 x Intel i219-LM)
- 1 x RS-485, 5 x RS-232
- Compact and fanless design




产品参数

产品参数		
系统参数	CPU	Intel® Core™ i3-9100/i5-6400/i5-9400
	芯片组	H110
	BIOS	AMI 64Mbit UEFI
	内存	2x SODIMM DDR4, MAX 32GB
	储存	1x M.2 M-Key 2280, SATA 3.0; 1 x SATA, support 2.5"SSD/HDD
外部I/O	显示	2x DP, MAX 4096 x 2304@60Hz; 1x VGA, MAX 1920 x 1080@60Hz; DP+DP/DP+VGA 独立双显
	以太网	1x LAN, Intel® I219LM 2x LAN, Intel® I210AT
	串口	3x RS-232; 3x RS-485/232
	USB	4x USB3.0; 4x USB2.0
	音频	1x Line-out、1x Mic-in, Realtek ALC662
其他	REMOTE	支持远程开关和指示灯的4针连接器
	RESET	支持关机长按重置BIOS

产品参数

内部扩展	USB	1xUSB2.0, Type-A
	miniPCle	1x miniPCle, 可扩展 WLAN/WWAN
	SIM	1x USIM, 可扩展 3G/4G
	PCle	-
	PCI	-
操作系统	OS	Windows 10 IoT LTSC、Linux
电源	输入电压	24V DC IN, 3PIN Phoenix
	整机功耗	MAX 120W
机械参数	安装方式	壁挂安装
	尺寸	220x226x75mm (长宽高)
	净重	3.4kg
	工作温度	0~60°C, 带0.7m/s气流
环境参数	存储温度	-40°C ~85°C, 60°C @ 95% (非凝结)
	相对湿度	10 ~ 95% @ 40°C(非凝结)
	EMC	CE、FCC Class B

HC6110

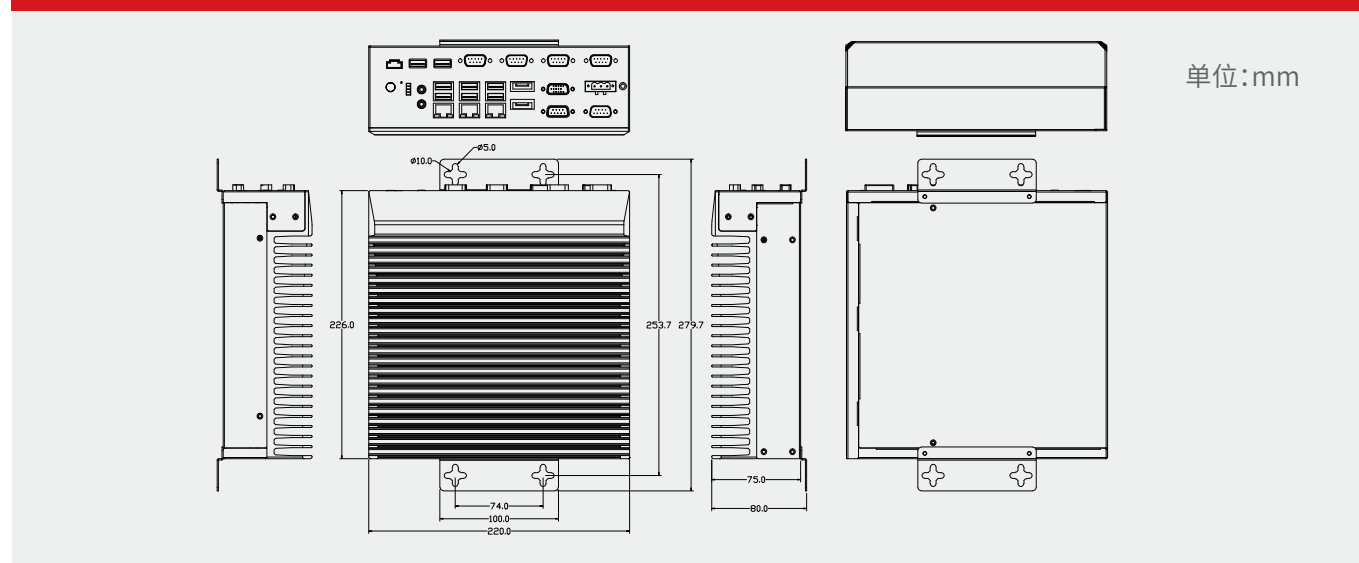

订购信息

型号	CPU	MEM	SSD	HDD (2.5")	扩展模组
HC6110-S9XXX	i3-9100	8G/16G	128G/256G/512G/1T	1T/2T	WIFI模块/4G通信模块
HC6110-C6XXX	i5-6400	8G/16G	128G/256G/512G/1T	1T/2T	WIFI模块/4G通信模块
HC6110-C9XXX	i5-9400	8G/16G	128G/256G/512G/1T	1T/2T	WIFI模块/4G通信模块

*XXX按顺序代表内存容量2^x、固态硬盘容量2^x、机械硬盘容量XT